



325

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Air Conditioning System	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	2
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Blade Dimensions	6
Working Ranges and Forces	7
Reach Boom Lift Capacities	
Counterweight: 8.3 mt (18,300 lb)	8
Counterweight: 4.9 mt (10,800 lb)	14
Variable Angle Boom Lift Capacities	
Counterweight: 4.9 mt (10,800 lb)	26
Bucket Specifications and Compatibility	32
Attachments Offering Guide	34
Standard and Optional Equipment	42
Dealer Installed Kits and Attachments	44
Cab Options	45

325 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C4.4	
Engine Power – ISO 9249	129 kW	172 hp
Engine Power – ISO 14396	129 kW	174 hp
Bore	105 mm	4 in
Stroke	127 mm	5 in
Displacement	4.4 L	269 in ³

- Meets EU Stage V emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Rating at 2,200 rpm.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.8 kg of refrigerant which has a CO₂ equivalent of 1.144 metric tonnes.

Swing Mechanism

Swing Speed	11.1 rpm	
Maximum Swing Torque	82 kN·m	60,300 lbf·ft

Weights

Operating Weight	26 100 kg	57,500 lb
• Long undercarriage, Reach boom, R2.9B1 (9'6") stick, HD 1.19 m ³ (1.56 yd ³) bucket, 600 mm (24") HD triple grouser shoes and 4.9 mt (10,800 lb) counterweight + blade.		
Operating Weight	27 700 kg	61,100 lb
• Long undercarriage, Reach boom, HD R2.9B1 (9'6") stick, 1.19 m ³ (1.56 yd ³) bucket, 600 mm (24") HD triple grouser shoes and 8.3 mt (18,300 lb) counterweight.		

Track

Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	790 mm	31 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	5.7 km/h	3.5 mph
Maximum Drawbar Pull	201 kN	45,232 lbf

Hydraulic System

Main System – Maximum Flow – Implement	429 L/min	113 gal/min
Maximum Pressure – Equipment – Normal	35 000 kPa	5,075 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,510 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	27 500 kPa	3,988 psi
Boom Cylinder – Bore	125 mm	5 in
Boom Cylinder – Stroke	1410 mm	56 in
Stick Cylinder – Bore	140 mm	6 in
Stick Cylinder – Stroke	1504 mm	59 in
Bucket Cylinder – Bore	120 mm	5 in
Bucket Cylinder – Stroke	1104 mm	43 in

Service Refill Capacities

Fuel Tank Capacity	313 L	82.7 gal
Cooling System	12 L	3.1 gal
Engine Oil (with filter)	15 L	4.0 gal
Swing Drive	12 L	3.2 gal
Final Drive (each)	4 L	1.1 gal
Hydraulic System (including tank)	230 L	60.8 gal
Hydraulic Tank (including suction pipe)	111 L	29.3 gal
DEF Tank	26 L	6.9 gal

Standards

Brakes	ISO 10265:2008
Cab/ROPS	ISO 12117-2:2008
Cab	ISO 10262:1998 Level I
FOGS (optional)	ISO 10262:1998 Level II

Sound Performance

ISO 6395 (external)	97 dB(A)
ISO 6396 (inside cab)	70 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

325 Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

	600 mm (24 in) HD Triple Grouser Shoes		700 mm (28 in) HD Triple Grouser Shoes		790 mm (31 in) HD Triple Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
Base Frame with Track Rollers and Carrier Rollers						
4.9 mt (10,800 lb) Counterweight + Long Undercarriage Base Machine						
Reach Boom + R2.9B1 (9'6") Stick + 1.19 m ³ (1.56 yd ³) HD Bucket + Blade	26 100 (57,500)	54.3 (7.9)	26 400 (58,200)	47.1 (6.8)	26 700 (58,900)	42.2 (6.1)
Variable Angle Boom + R2.9B1 (9'6") Stick + 1.19 m ³ (1.56 yd ³) HD Bucket + Blade	27 000 (59,500)	56.2 (8.1)	27 400 (60,400)	48.8 (7.1)	27 000 (61,100)	43.8 (6.3)
8.3 mt (18,300 lb) Counterweight + Long Undercarriage Base Machine						
Reach Boom + R2.9B1 (9'6") Stick + 1.19 m ³ (1.56 yd ³) HD Bucket	27 700 (61,100)	57.6 (8.4)	28 100 (61,900)	50.1 (7.3)	28 400 (62,600)	44.9 (6.5)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

325 Hydraulic Excavator Specifications

Major Component Weights


	kg	lb
Base Machine Weight (including upperframe, long undercarriage, counterweight, boom cylinders, without boom, stick, bucket, stick cylinder, bucket cylinder, tracks, blade, fuel, operator)		
With Reach Boom and 4.9 mt (10,800 lb) Counterweight (for use with Blade)	17 490	38,500
With Reach Boom and 8.3 mt (18,300 lb) Counterweight	20 250	44,600
With Variable Angle Boom and 4.9 mt (10,800 lb) Counterweight (for use with blade)	17 420	38,400
Track Shoes:		
600 mm (24") Width, 12.5 mm (0.49") Thick, HD Triple Grouser Track Shoes	3190	7,000
700 mm (28") Width, 12.5 mm (0.49") Thick, HD Triple Grouser Track Shoes	3520	7,800
790 mm (31") Width, 12.5 mm (0.49") Thick, HD Triple Grouser Track Shoes with Step Extension for ISO 2867	3860	8,500
Two Boom Cylinders		
Reach Boom	420	900
Variable Angle Boom	360	800
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	310	700
Blades (including lines, cylinders, frame modifications):		
2980 mm (9'9") Width, suitable for use with 4.9 mt (10,800 lb) Counterweight and 600 mm (24") Width Track Shoes	1090	2,400
3170 mm (10'5") Width, suitable for use with 4.9 mt (10,800 lb) Counterweight and 700 mm (28") or 790 mm (31") Width Track Shoes	1130	2,500
Counterweights:		
4.9 mt (10,800 lb) Counterweight	4900	10,800
8.3 mt (18,300 lb) Counterweight	8300	18,300
Booms (including lines, pins, stick cylinder):		
Reach Boom (5.7 m/18'8")	1740	3,800
HD Reach Boom (5.7 m/18'8")	1910	4,200
AUX lines (HP + QC)	130	300
Variable Angle Boom (2.7 m [8'10"] Stub + 3.3 m [10'10"] Fore)	2870	6,300
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick (R2.9B1/9'6")	1030	2,300
HD Reach Stick (R2.9B1/9'6")	1140	2,500
AUX lines (HP + QC)	60	100
Buckets (without linkage, with tips and side cutters):		
1.00 m ³ (1.30 yd ³) HD B Linkage	955	2,100
1.19 m ³ (1.56 yd ³) HD B Linkage	1040	2,300
Quick Couplers:		
Pin Grabber QC B without Pins	430	900
CW QC B without Pins	250	500

Refer to pages 31-32 for a complete list of bucket options.

325 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

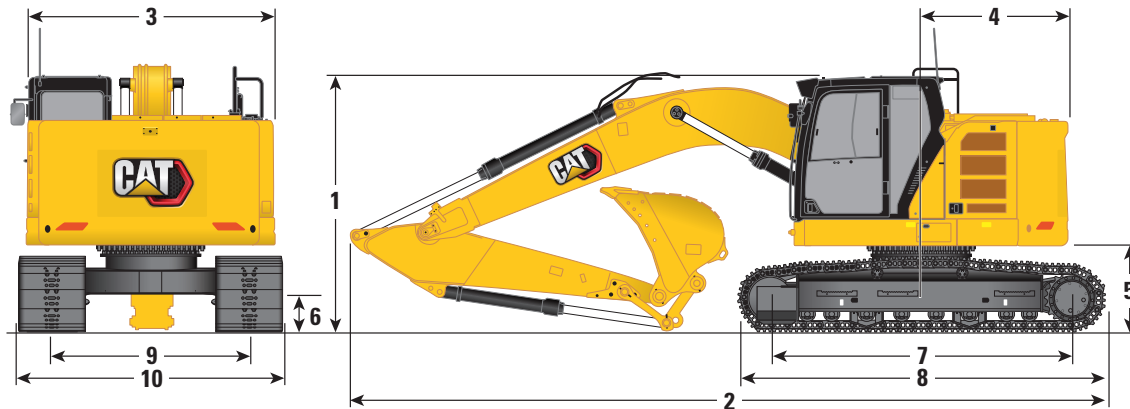

Boom Options

Reach Boom
5.7 m (18'8")

Variable Angle Boom
2.7 m/3.3 m (8'10"/10'10")

Stick Option

Reach Stick
R2.9B1 (9'6")


Reach Stick
R2.9B1 (9'6")

	Reach Boom 5.7 m (18'8")		Variable Angle Boom 2.7 m/3.3 m (8'10"/10'10")	
	Reach Stick R2.9B1 (9'6")		Reach Stick R2.9B1 (9'6")	
1 Machine Height:				
Cab Height	3078 mm	10'1"	3078 mm	10'1"
FOGS Height	3217 mm	10'6"	3217 mm	10'6"
Guardrails/Handrails Height	3187 mm	10'5"	3187 mm	10'5"
With Boom/Stick/Bucket Installed	3209 mm	10'5"	3037 mm	10'0"
With Boom/Stick Installed	2984 mm	9'8"	3037 mm	10'0"
With Boom Installed	2526 mm	8'3"	2698 mm	8'9"
2 Machine Length:				
With Boom/Stick/Bucket Installed	8908 mm	29'2"	9175 mm	30'1"
With Boom/Stick Installed	8850 mm	29'0"	8911 mm	29'2"
With Boom Installed	7782 mm	25'5"	8063 mm	26'5"
With Blade Installed	9605 mm	31'5"	9872 mm	32'4"
3 Upperframe Width without Walkways	2987 mm	9'8"	2987 mm	9'8"
4 Tail Swing Radius:				
4.9 mt (10,800 lb) Counterweight	1780 mm	5'8"	1780 mm	5'8"
8.3 mt (18,300 lb) Counterweight	1814 mm	6'0"	—	—
5 Counterweight Clearance	978 mm	3'2"	1018 mm	3'3"
6 Ground Clearance	441 mm	1'4"	441 mm	1'4"
7 Length to Center of Rollers	3646 mm	12'0"	3646 mm	12'0"
8 Track Length	4455 mm	14'6"	4455 mm	14'6"
9 Track Gauge	2380 mm	7'8"	2380 mm	7'8"
Track Width:				
600 mm (24") Shoes	600 mm	2'0"	600 mm	2'0"
700 mm (28") Shoes	700 mm	2'3"	700 mm	2'3"
790 mm (31") Shoes	790 mm	2'6"	790 mm	2'6"
10 Undercarriage Width (with steps/without steps):				
600 mm (24") Shoes	2980 mm	9'8"	2980 mm	9'8"
700 mm (28") Shoes	3080 mm	10'1"	3080 mm	10'1"
790 mm (31") Shoes	3170 mm	10'4"	3170 mm	10'4"
Bucket Type	HD		HD	
Bucket Capacity	1.30 m ³	1.70 yd ³	1.30 m ³	1.70 yd ³
Bucket Tip Radius	1698 mm	5'6"	1698 mm	5'6"

325 Hydraulic Excavator Specifications

Blade Dimensions

All dimensions are approximate.


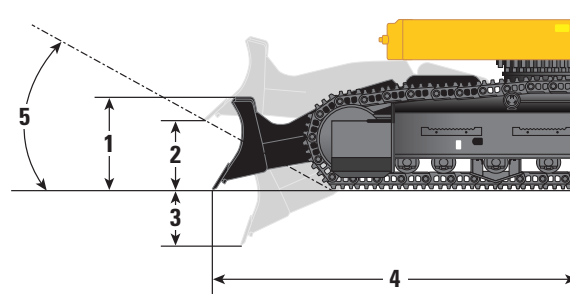


Recommended Track Shoe Width	600 mm (24")		700 mm (28")		790 mm (31")	
Blade Options	2980 mm (9'8")		3170 mm (10'4")			
1 Blade Moldboard Height	695 mm	2'3"	695 mm	2'3"	695 mm	2'3"
2 Blade Maximum Cutting Edge Rise	581 mm	1'9"	581 mm	1'9"	581 mm	1'9"
3 Blade Minimum Cutting Edge Depth	482 mm	1'6 "	482 mm	1'6 "	482 mm	1'6 "
4 Blade Edge from Machine Center	2925 mm	9'6"	2925 mm	9'6"	2925 mm	9'6"
5 Ramp Angle	28.8 degrees		28.8 degrees			

325 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

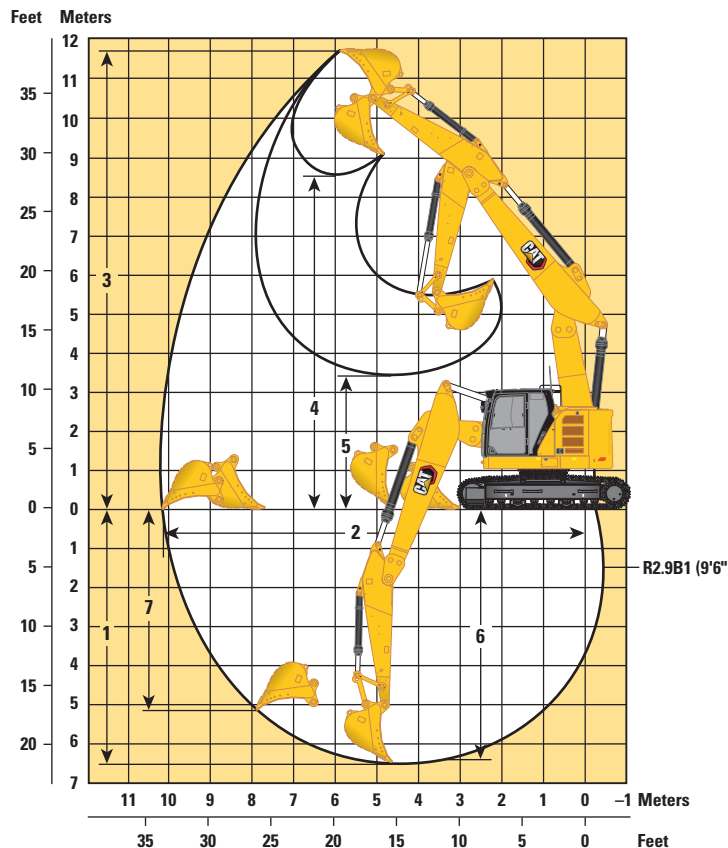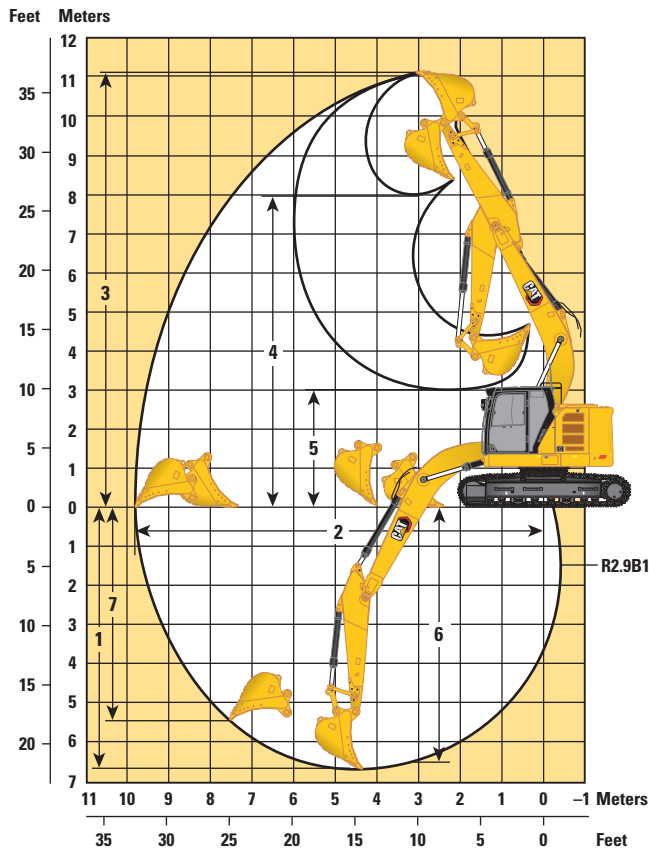

Boom Options

**Reach Boom
5.7 m (18'8")**

**Variable Angle Boom
2.7 m/3.3 m (8'10"/10'10")**

Stick Option




**Reach Stick
R2.9B1 (9'6")**

**Reach Stick
R2.9B1 (9'6")**

	Reach Boom 5.7 m (18'8")	Variable Angle Boom 2.7 m/3.3 m (8'10"/10'10")		
1 Maximum Digging Depth	6700 mm	22'0"	6520 mm	21'4"
2 Maximum Reach at Ground Line	9780 mm	32'1"	10 130 mm	33'2"
3 Maximum Cutting Height	11 090 mm	36'4"	11 680 mm	38'3"
4 Maximum Loading Height	7970 mm	26'1"	8540 mm	28'0"
5 Minimum Loading Height	3010 mm	9'9"	3420 mm	11'2"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	6530 mm	21'4"	6420 mm	21'1"
7 Maximum Vertical Wall Digging Depth	5470 mm	17'9"	5150 mm	16'9"
Minimum Working Equipment Radius	2280 mm	7'5"	2470 mm	8'1"
Bucket Digging Force (ISO)	141 kN	31 588 lbf	150 kN	33 811 lbf
Stick Digging Force (ISO)	107 kN	23 980 lbf	108 kN	24 295 lbf
Bucket Type	HD		HD	
Bucket Capacity	1.30 m ³	1.70 yd ³	1.30 m ³	1.70 yd ³
Bucket Tip Radius	1698 mm	5'6"	1698 mm	5'6"

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 8.3 mt (18,300 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	*6400 *13,800			*3950 *8,700	*3950 *8,700	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	*8150 *17,600	*7050 *15,300	6250 13,450	*6300 *12,700	4500 9,600	*3900 *8,550	*3900 *8,550	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	9050 19,550	*8000 *17,350	6000 12,950	6800 14,650	4350 9,400	*4000 *8,800	3750 8,250	8330 330
1500 mm 60 in	kg lb					*12 050 *26,050	8600 18,500	*8900 *19,300	5800 12,450	6700 14,400	4250 9,150	*4250 *9,350	3650 8,050	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	*12 850 *27,800	8350 17,950	9100 19,600	5650 12,100	6600 14,200	4200 9,000	*4750 *10,450	3750 8,250	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *28,100	*12 600 *27,350	8300 17,800	9050 19,450	5550 12,000	6600 *12,700	4150 9,000	*5650 *12,400	4050 8,950	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	*15 750 *34,150	*11 400 *24,600	8350 17,950	*8450 *18,150	5600 12,100			*7100 *15,650	4850 10,700	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	*8600 *18,100					*6850 *14,950	*6850 *14,950	5320 210



ISO 10567





*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 8.3 mt (18,300 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	*6300 *13,700			*3900 *8,650	*3900 *8,650	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	6200 13,300	*6300 *12,650	4400 9,450	*3850 *8,500	*3850 *8,500	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	8950 19,350	*7900 *17,050	5950 12,750	6750 14,500	4300 9,250	*4000 *8,750	3650 8,050	8330 330
1500 mm 60 in	kg lb					*11 850 *25,650	8450 18,200	*8750 *19,000	5700 12,200	6600 14,200	4150 8,950	*4250 *9,300	3550 7,850	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	*12 650 *27,350	8150 17,600	9000 19,350	5500 11,850	6500 14,000	4100 8,800	*4700 *10,400	3650 8,000	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *28,050	*12 400 *26,850	8100 17,400	8900 19,150	5450 11,700	6500 *12,650	4050 8,750	*5600 *12,350	3950 8,750	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	*15 450 *33,500	*11 200 *24,150	8200 17,600	*8300 *17,800	5500 11,800			*6950 *15,300	4700 10,450	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	*8400 *17,700					*6650 *14,600	*6650 *14,600	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.














Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 8.3 mt (18,300 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	*6400 *13,950			*3950 *8,700	*3950 *8,700	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	*8150 *17,600	*7050 *15,300	6300 13,600	*6300 *12,700	4550 9,700	*3900 *8,550	*3900 *8,550	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	9150 19,750	*8000 *17,350	6100 13,100	6900 14,800	4450 9,500	*4000 *8,800	3800 8,350	8330 330
1500 mm 60 in	kg lb					*12 050 *26,050	8700 18,750	*8900 *19,300	5850 12,600	6750 14,550	4300 9,300	*4250 *9,350	3700 8,100	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	*12 850 *27,800	8450 18,150	9200 19,800	5700 12,250	6700 14,400	4250 9,100	*4750 *10,450	3800 8,350	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *28,100	*12 600 *27,350	8400 18,000	9150 19,650	5650 12,100	6650 *12,700	4200 9,100	*5650 *12,400	4100 9,100	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	*15 750 *34,150	*11 400 *24,600	8450 18,200	*8450 *18,150	5700 12,250			*7100 *15,650	4900 10,850	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	*8600 *18,100					*6850 *14,950	*6850 *14,950	5320 210



ISO 10567





*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 8.3 mt (18,300 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	*6300 *13,850			*3900 *8,650	*3900 *8,650	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	6250 13,450	*6300 *12,650	4450 9,550	*3850 *8,500	*3850 *8,500	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	9050 19,550	*7900 *17,050	6000 12,900	*6800 *14,650	4350 9,350	*4000 *8,750	3700 8,150	8330 330
1500 mm 60 in	kg lb					*11 850 *25,650	8550 18,400	*8750 *19,000	5750 12,350	6700 14,400	4200 9,100	*4250 *9,300	3600 7,950	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	*12 650 *27,350	8250 17,800	9100 19,550	5550 12,000	6600 14,200	4150 8,900	*4700 *10,400	3700 8,100	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *28,050	*12 400 *26,850	8200 17,650	9000 19,400	5500 11,850	6550 *12,650	4100 8,850	*5600 *12,350	4000 8,850	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	*15 450 *33,500	*11 200 *24,150	8250 17,800	*8300 *17,800	5550 11,950			*6950 *15,300	4800 10,600	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	*8400 *17,700					*6650 *14,600	*6650 *14,600	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 8.3 mt (18,300 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb				*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150				*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb				*6650 *14,500	*6650 *14,500	*6400 *14,050	*6400 *14,050				*3950 *8,700	*3950 *8,700	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	*8150 *17,600	*7050 *15,300	6400 13,750	*6300 *12,700	4600 9,850	*3900 *8,550	*3900 *8,550	8000 320
3000 mm 120 in	kg lb				*10 250 *22,100	9250 19,950	*8000 *17,350	6150 13,250	*6900 15,000	4500 9,600	*4000 *8,800	3850 8,450	3850 8,450	8330 330
1500 mm 60 in	kg lb				*12 050 *26,050	8800 18,950	*8900 *19,300	5900 12,750	6850 14,750	4350 9,400	4350 9,400	*4250 *9,350	3750 8,200	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	*12 850 *27,800	8550 18,400	9300 20,050	5750 12,400	6750 14,550	4300 9,200	*4750 *10,450	3850 8,450	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *28,100	*12 600 *27,350	8450 18,250	9250 19,900	5700 12,250	6750 *12,700	4250 9,200	*5650 *12,400	4150 9,200	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	*15 750 *34,150	*11 400 *24,600	8550 18,400	*8450 *18,150	5750 12,400			*7100 *15,650	4950 10,950	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	*8600 *18,100					*6850 *14,950	*6850 *14,950	5320 210



ISO 10567





*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 8.3 mt (18,300 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	*6300 *13,850			*3900 *8,650	*3900 *8,650	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	6300 13,600	*6300 *12,650	4500 9,650	*3850 *8,500	*3850 *8,500	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	9150 19,750	*7900 *17,050	6050 13,050	*6800 *14,750	4400 9,450	*4000 *8,750	3750 8,250	8330 330
1500 mm 60 in	kg lb					*11 850 *25,650	8650 18,600	*8750 *19,000	5800 12,500	6750 14,550	4250 9,200	*4250 *9,300	3650 8,000	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	*12 650 *27,350	8350 18,000	9200 19,800	5650 12,150	6650 14,350	4200 9,000	*4700 *10,400	3750 8,200	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *28,050	*12 400 *26,850	8300 17,850	9150 19,650	5550 12,000	6650 *12,650	4150 9,000	*5600 *12,350	4050 8,950	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	*15 450 *33,500	*11 200 *24,150	8350 18,000	*8300 *17,800	5600 12,100			*6950 *15,300	4850 10,700	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	*8400 *17,700					*6650 *14,600	*6650 *14,600	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	5300 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	5250 11,300			*3950 *8,700	3750 8,400	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	7950 17,100	*7050 *15,300	5100 10,950	5450 11,700	3600 7,700	*3900 *8,550	3250 7,150	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	7400 15,900	7550 16,200	4850 10,450	5350 11,450	3500 7,500	*4000 *8,800	3000 6,550	8330 330
1500 mm 60 in	kg lb					11 500 24,700	6900 14,900	7250 15,650	4650 9,950	5200 11,200	3400 7,300	*4250 *9,350	2900 6,350	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	11 200 24,000	6650 14,350	7100 15,250	4500 9,650	5100 11,000	3300 7,100	4550 10,000	2950 6,500	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *27,150	11 100 23,850	6600 14,200	7000 15,100	4400 9,500	5100 11,000	3300 7,100	5000 11,000	3200 7,100	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	12 900 27,600	11 200 24,000	6650 14,350	7100 15,200	4450 9,600			6000 13,300	3850 8,500	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	6900 14,900					*6850 *14,950	5500 12,400	5320 210



ISO 10567





*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	5700 12,300			*3950 *8,700	*3950 *8,700	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	*8150 *17,600	*7050 *15,300	5550 11,950	*6300 *12,700	3900 8,400	*3900 *8,550	3550 7,800	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	8100 17,500	*8000 *17,350	5300 11,450	*6900 *15,000	3800 8,200	*4000 *8,800	3250 7,150	8330 330
1500 mm 60 in	kg lb					*12 050 *26,050	7650 16,400	*8900 *19,300	5100 10,900	*7300 *15,900	3700 7,950	*4250 *9,350	3150 6,950	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	*12 850 *27,800	7350 15,850	*9450 *20,500	4900 10,600	*7550 *16,300	3650 7,800	*4750 *10,450	3250 7,100	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *28,100	*12 600 *27,350	7300 15,700	*9400 *20,350	4850 10,450	*7250 *12,700	3600 7,800	*5650 *12,400	3550 7,750	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	14 550 31,150	*11 400 *24,600	7400 15,850	*8450 *18,150	4900 10,550			*7100 *15,650	4200 9,300	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	7600 16,400					*6850 *14,950	6050 13,600	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	5250 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	5200 11,200			*3900 *8,650	3700 8,250	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	7900 17,000	*6950 *15,100	5050 10,850	5400 11,550	3550 7,550	*3850 *8,500	3150 7,000	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	7300 15,700	7450 16,050	4800 10,300	5250 11,300	3400 7,350	*4000 *8,750	2900 6,350	8330 330
1500 mm 60 in	kg lb					11 350 24,400	6750 14,550	7200 15,400	4550 9,750	5150 11,000	3300 7,100	*4250 *9,300	2800 6,150	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	11 050 23,650	6500 13,950	7000 15,000	4350 9,350	5050 10,800	3200 6,900	4450 9,800	2850 6,300	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	12 350 26,450	10 950 23,450	6400 13,800	6900 14,850	4300 9,200	5000 10,800	3200 6,850	4900 10,750	3100 6,850	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	12 600 26,950	11 050 23,650	6500 13,950	6950 14,950	4350 9,350			5900 13,050	3750 8,250	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	6750					*6650 *14,600	5350 12,150	5320 210



ISO 10567





*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	5700 12,200			*3900 *8,650	*3900 *8,650	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	5500 11,800	*6300 *12,650	3850 8,250	*3850 *8,500	3450 7,650	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	8000 17,300	*7900 *17,050	5250 11,250	*6800 *14,750	3750 8,050	*4000 *8,750	3150 6,950	8330 330
1500 mm 60 in	kg lb					*11 850 *25,650	7500 16,100	*8750 *19,000	4950 10,700	*7200 *15,600	3600 7,750	*4250 *9,300	3050 6,750	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	*12 650 *27,350	7200 15,500	*9300 *20,150	4800 10,300	*7400 *16,000	3550 7,600	*4700 *10,400	3150 6,900	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *28,050	*12 400 *26,850	7100 15,300	*9250 *20,000	4700 10,150	*7100 *12,650	3500 7,550	*5600 *12,350	3450 7,550	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	14 250 30,500	*11 200 *24,150	7200 15,500	*8300 *17,800	4800 10,300			*6950 *15,300	4100 9,100	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	7450 16,100					*6650 *14,600	5900 13,350	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	5350 11,450			*3950 *8,700	3850 8,500	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	8050 17,300	*7050 *15,300	5150 11,150	5500 11,850	3650 7,850	*3900 *8,550	3300 7,250	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	7500 16,150	7650 16,400	4950 10,600	5400 11,600	3550 7,650	*4000 *8,800	3050 6,650	8330 330
1500 mm 60 in	kg lb					11 650 25,000	7000 15,100	7400 15,850	4700 10,150	5300 11,350	3450 7,400	*4250 *9,350	2950 6,450	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	11 350 24,350	6750 14,550	7200 15,450	4550 9,800	5200 11,200	3350 7,250	4600 10,150	3000 6,600	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *27,550	11 300 24,150	6700 14,400	7150 15,300	4500 9,650	5200 11,150	3350 7,200	5050 11,150	3300 7,200	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	13 100 28,000	11 350 24,350	6800 14,550	7200 15,450	4550 9,750			6100 13,500	3900 8,650	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	7000 15,100					*6850 *14,950	5600 12,600	5320 210



ISO 10567





*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.














Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	6000 12,900			*3950 *8,700	*3950 *8,700	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	*8150 *17,600	*7050 *15,300	5850 12,550	*6300 *12,700	4150 8,850	*3900 *8,550	3700 8,200	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	8550 18,450	*8000 *17,350	5600 12,050	*6900 *15,000	4000 8,650	*4000 *8,800	3450 7,550	8330 330
1500 mm 60 in	kg lb					*12 050 *26,050	8050 17,350	*8900 *19,300	5350 11,500	*7300 *15,900	3900 8,400	*4250 *9,350	3350 7,300	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	*12 850 *27,800	7800 16,800	*9450 *20,500	5200 11,150	*7550 *16,300	3850 8,250	*4750 *10,450	3400 7,500	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *28,100	*12 600 *27,350	7750 16,650	*9400 *20,350	5150 11,050	*7250 *12,700	3800 8,200	*5650 *12,400	3750 8,200	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	15 550 33,300	*11 400 *24,600	7800 16,800	*8450 *18,150	5200 11,150			*7100 *15,650	4450 9,850	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	8050 17,350					*6850 *14,950	6350 14,400	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	5300 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	5300 11,350			*3900 *8,650	3750 8,350	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	8000 17,250	*6950 *15,100	5100 11,000	5450 11,700	3600 7,700	*3850 *8,500	3200 7,100	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	7400 15,950	7550 16,250	4850 10,450	5350 11,450	3500 7,450	*4000 *8,750	2950 6,450	8330 330
1500 mm 60 in	kg lb					11 550 24,750	6850 14,800	7300 15,650	4600 9,900	5200 11,200	3350 7,200	*4250 *9,300	2850 6,250	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	11 200 24,000	6600 14,200	7100 15,200	4450 9,500	5100 11,000	3250 7,000	4550 9,950	2900 6,400	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *26,900	11 100 23,800	6500 14,000	7000 15,050	4350 9,350	5100 10,950	3250 7,000	4950 10,950	3150 7,000	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	12 800 27,400	*11 200 24,000	6600 14,200	7050 15,200	4400 9,500			6000 13,250	3800 8,400	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	6850 14,800					*6650 *14,600	5450 12,300	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	5950 12,800			*3900 *8,650	*3900 *8,650	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	5800 12,400	*6300 *12,650	4050 8,700	*3850 *8,500	3650 8,050	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	8450 18,250	*7900 *17,050	5500 11,850	*6800 *14,750	3950 8,450	*4000 *8,750	3350 7,350	8330 330
1500 mm 60 in	kg lb					*11 850 *25,650	7950 17,050	*8750 *19,000	5250 11,300	*7200 *15,600	3800 8,200	*4250 *9,300	3250 7,150	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	*12 650 *27,350	7650 16,400	*9300 *20,150	5050 10,900	*7400 *16,000	3750 8,000	*4700 *10,400	3300 7,300	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *28,050	*12 400 *26,850	7550 16,250	*9250 *20,000	5000 10,750	*7100 *12,650	3700 8,000	*5600 *12,350	3650 8,000	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	15 250 32,650	*11 200 *24,150	7650 16,450	*8300 *17,800	5050 10,900			*6950 *15,300	4350 9,600	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	7900 17,050					*6650 *14,600	6250 14,100	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	5400 11,600			*3950 *8,700	3900 8,650	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	8150 17,500	*7050 *15,300	5250 11,250	5600 12,000	3700 7,950	*3900 *8,550	3350 7,350	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	7600 16,350	7750 16,650	5000 10,750	5500 11,800	3600 7,750	*4000 *8,800	3050 6,750	8330 330
1500 mm 60 in	kg lb					11 850 25,400	7100 15,350	7500 16,100	4750 10,300	5350 11,550	3500 7,500	*4250 *9,350	3000 6,550	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	11 550 24,700	6850 14,800	7300 15,700	4600 9,950	5300 11,350	3400 7,350	4700 10,300	3050 6,700	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *27,950	11 450 24,550	6800 14,650	7250 15,550	4550 9,800	5250 11,350	3400 7,350	5150 11,300	3350 7,300	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	13 250 28,400	*11 400 *24,600	6850 14,800	7300 15,700	4600 9,900			6150 13,700	3950 8,800	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	7100 15,300					*6850 *14,950	5650 12,750	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,350	*5000 *11,350	4500 170
7500 mm 300 in	kg lb					*6200 *13,650	*6200 *13,650	*5350 *10,150	*5350 *10,150			*4200 *9,350	*4200 *9,350	6280 250
6000 mm 240 in	kg lb					*6650 *14,500	*6650 *14,500	*6400 *14,050	6100 13,050			*3950 *8,700	*3950 *8,700	7350 290
4500 mm 180 in	kg lb			*10 650 *22,700	*10 650 *22,700	*8150 *17,600	*8150 *17,600	*7050 *15,300	5900 12,700	*6300 *12,700	4200 8,950	*3900 *8,550	3750 8,300	8000 320
3000 mm 120 in	kg lb					*10 250 *22,100	8700 18,700	*8000 *17,350	5650 12,200	*6900 *15,000	4100 8,750	*4000 *8,800	3500 7,650	8330 330
1500 mm 60 in	kg lb					*12 050 *26,050	8200 17,600	*8900 *19,300	5450 11,700	*7300 *15,900	3950 8,550	*4250 *9,350	3400 7,450	8390 330
0 mm 0 in	kg lb			*7450 *17,000	*7450 *17,000	*12 850 *27,800	7900 17,050	*9450 *20,500	5250 11,350	*7550 *16,300	3900 8,350	*4750 *10,450	3450 7,600	8170 330
-1500 mm -60 in	kg lb	*7750 *17,300	*7750 *17,300	*12 400 *28,100	*12 400 *28,100	*12 600 *27,350	7850 16,900	*9400 *20,350	5200 11,200	*7250 *12,700	3850 8,350	*5650 *12,400	3800 8,300	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,950	*12 900 *28,950	*15 750 *34,150	*15 750 *33,750	*11 400 *24,600	7950 17,050	*8450 *18,150	5250 11,300			*7100 *15,650	4500 10,000	6760 270
-4500 mm -180 in	kg lb			*11 800 *25,100	*11 800 *25,100	*8600 *18,100	8150 17,600					*6850 *14,950	6450 14,600	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	5350 11,500			*3900 *8,650	3800 8,500	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	5200 11,150	5550 11,900	3650 7,800	*3850 *8,500	3250 7,200	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	7500 16,150	7650 16,500	4900 10,600	5400 11,650	3550 7,550	*4000 *8,750	3000 6,550	8330 330
1500 mm 60 in	kg lb					11 700 25,100	6950 15,000	7400 15,900	4650 10,050	5300 11,350	3400 7,300	*4250 *9,300	2900 6,350	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	11 350 24,350	6700 14,400	7200 15,450	4500 9,650	5200 11,150	3300 7,150	4600 10,100	2950 6,500	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *27,300	11 250 24,150	6600 14,250	7100 15,300	4400 9,500	5150 11,150	3300 7,100	5050 11,100	3200 7,100	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	13 000 27,800	*11 200 *24,150	6700 14,400	7150 15,450	4500 9,650			6050 13,450	3850 8,550	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	6950 15,000					*6650 *14,600	5550 12,500	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb											*5000 *11,300	*5000 *11,300	4500 170
7500 mm 300 in	kg lb					*6150 *13,500	*6150 *13,500	*5350 *10,100	*5350 *10,100			*4200 *9,300	*4200 *9,300	6280 250
6000 mm 240 in	kg lb					*6600 *14,350	*6600 *14,350	*6300 *13,850	6050 12,950			*3900 *8,650	*3900 *8,650	7350 290
4500 mm 180 in	kg lb			*10 600 *22,500	*10 600 *22,500	*8050 *17,400	*8050 *17,400	*6950 *15,100	5850 12,600	*6300 *12,650	4100 8,800	*3850 *8,500	3700 8,150	8000 320
3000 mm 120 in	kg lb					*10 100 *21,800	8600 18,500	*7900 *17,050	5600 12,000	*6800 *14,750	4000 8,600	*4000 *8,750	3400 7,450	8330 330
1500 mm 60 in	kg lb					*11 850 *25,650	8050 17,300	*8750 *19,000	5350 11,450	*7200 *15,600	3900 8,350	*4250 *9,300	3300 7,250	8390 330
0 mm 0 in	kg lb			*7400 *16,950	*7400 *16,950	*12 650 *27,350	7750 16,650	*9300 *20,150	5150 11,050	*7400 *16,000	3800 8,150	*4700 *10,400	3400 7,400	8170 330
-1500 mm -60 in	kg lb	*7700 *17,250	*7700 *17,250	*12 350 *28,050	*12 350 *28,050	*12 400 *26,850	7650 16,500	*9250 *20,000	5100 10,900	*7100 *12,650	3750 8,100	*5600 *12,350	3700 8,100	7650 300
-3000 mm -120 in	kg lb	*12 900 *28,900	*12 900 *28,900	*15 450 *33,500	*15 450 *33,100	*11 200 *24,150	7750 16,650	*8300 *17,800	5150 11,050			*6950 *15,300	4400 9,750	6760 270
-4500 mm -180 in	kg lb			*11 500 *24,550	*11 500 *24,550	*8400 *17,700	8000 17,300					*6650 *14,600	6350 14,300	5320 210



ISO 10567






*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*4950 *11,150	*4950 *11,150					*4950 *11,200	*4950 *11,200	5120 200
7500 mm 300 in	kg lb					*7000 *15,450	*7000 *15,450	*4150 *9,300	*4150 *9,300			*4250 *9,400	*4250 *9,400	6740 270
6000 mm 240 in	kg lb					*7350 *16,050	*7350 *16,050	*5200 *10,050	*5200 *10,050	*4000 *8,700	3550 7,550	*3950 *8,700	3350 7,400	7740 310
4500 mm 180 in	kg lb			*11 300 *24,600	*11 300 *24,600	*7150 *15,600	*7150 *15,600	*4850 *10,350	*4850 *10,350	*3950 *8,700	3450 7,400	*3850 *8,500	2850 6,300	8360 330
3000 mm 120 in	kg lb	*9050 *16,000	*9050 *16,000	*10 250 *23,350	*10 250 *23,350	*6650 *14,550	*6650 *14,550	*4100 *8,950	*4100 *8,950	*4200 *9,350	3300 7,100	*3950 *8,650	2600 5,750	8680 350
1500 mm 60 in	kg lb			*5950 *13,350	*5950 *13,350	*6100 *13,150	*6100 *13,150	*4700 *10,150	4350 9,350	*4800 *10,400	3150 6,800	4050 8,900	2550 5,550	8730 350
0 mm 0 in	kg lb	*6600 *14,250	*6600 *14,250	*5550 *12,250	*5550 *12,250	*8050 *17,350	6200 13,300	*5600 *12,100	4150 8,950	4950 10,650	3050 6,600	4150 9,100	2600 5,650	8520 340
-1500 mm -60 in	kg lb	*9150 *20,250	*9150 *20,250	*9900 *22,450	*9900 *22,450	*9200 *20,000	6150 13,200	6800 14,600	4100 8,800	4950 10,600	3050 6,550	*4450 *9,750	2800 6,150	8020 320
-3000 mm -120 in	kg lb	*14 800 *33,100	*14 800 *33,100	*10 000 *21,650	*10 000 *21,650	*6850 *14,700	6250 13,450	*5300 *11,250	4150 8,950			*3900 *8,650	3350 7,450	7120 280
-4500 mm -180 in	kg lb	*22 150 *49,250	*22 150 *49,250	*10 400 *22,550	*10 400 *22,550	*6650 *14,500	6600 14,250					*6150 *14,200	5900 13,800	4880 190



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*4950 *11,150	*4950 *11,150					*4950 *11,200	*4950 *11,200	5120 200
7500 mm 300 in	kg lb					*7000 *15,450	*7000 *15,450	*4150 *9,300	*4150 *9,300			*4250 *9,400	*4250 *9,400	6740 270
6000 mm 240 in	kg lb					*7350 *16,050	*7350 *16,050	*5200 *10,050	*5200 *10,050	*4000 *8,700	3850 8,250	*3950 *8,700	3650 8,100	7740 310
4500 mm 180 in	kg lb			*11 300 *24,600	*11 300 *24,600	*7150 *15,600	*7150 *15,600	*4850 *10,350	*4850 *10,350	*3950 *8,700	3800 8,150	*3850 *8,500	3150 6,950	8360 330
3000 mm 120 in	kg lb	*9050 *16,000	*9050 *16,000	*10 250 *23,350	*10 250 *23,350	*6650 *14,550	*6650 *14,550	*4100 *8,950	*4100 *8,950	*4200 *9,350	3650 7,850	*3950 *8,650	2900 6,350	8680 350
1500 mm 60 in	kg lb			*5950 *13,350	*5950 *13,350	*6100 *13,150	*6100 *13,150	*4700 *10,150	*4700 *10,150	*4800 *10,400	3500 7,500	*4150 *9,050	2800 6,150	8730 350
0 mm 0 in	kg lb	*6600 *14,250	*6600 *14,250	*5550 *12,250	*5550 *12,250	*8050 *17,350	6900 14,900	*5600 *12,100	4600 9,900	*5450 *12,100	3400 7,300	*4500 *9,900	2850 6,250	8520 340
-1500 mm -60 in	kg lb	*9150 *20,250	*9150 *20,250	*9900 *22,450	*9900 *22,450	*9200 *20,000	6850 14,750	*7150 *15,400	4550 9,800	*5300 *11,200	3350 7,250	*4450 *9,750	3100 6,850	8020 320
-3000 mm -120 in	kg lb	*14 800 *33,100	*14 800 *33,100	*10 000 *21,650	*10 000 *21,650	*6850 *14,700	*6850 *14,700	*5300 *11,250	4600 9,950			*3900 *8,650	3700 8,250	7120 280
-4500 mm -180 in	kg lb	*22 150 *49,250	*22 150 *49,250	*10 400 *22,550	*10 400 *22,550	*6650 *14,500	*6650 *14,500					*6150 *14,200	*6150 *14,200	4880 190



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*4950 *11,150	*4950 *11,150					*4950 *11,200	*4950 *11,200	5120 200
7500 mm 300 in	kg lb					*7000 *15,450	*7000 *15,450	*4150 *9,300	*4150 *9,300			*4250 *9,400	*4250 *9,400	6740 270
6000 mm 240 in	kg lb					*7350 *16,050	*7350 *16,050	*5200 *10,050	*5200 *10,050	*4000 *8,700	3600 7,650	*3950 *8,700	3400 7,500	7740 310
4500 mm 180 in	kg lb			*11 300 *24,600	*11 300 *24,600	*7150 *15,600	*7150 *15,600	*4850 *10,350	*4850 *10,350	*3950 *8,700	3500 7,550	*3850 *8,500	2900 6,400	8360 330
3000 mm 120 in	kg lb	*9050 *16,000	*9050 *16,000	*10 250 *23,350	*10 250 *23,350	*6650 *14,550	*6650 *14,550	*4100 *8,950	*4100 *8,950	*4200 *9,350	3400 7,250	*3950 *8,650	2650 5,850	8680 350
1500 mm 60 in	kg lb			*5950 *13,350	*5950 *13,350	*6100 *13,150	*6100 *13,150	*4700 *10,150	4450 9,500	*4800 *10,400	3250 6,950	4100 9,000	2600 5,650	8730 350
0 mm 0 in	kg lb	*6600 *14,250	*6600 *14,250	*5550 *12,250	*5550 *12,250	*8050 *17,350	6300 13,550	*5600 *12,100	4250 9,100	5050 10,800	3100 6,700	4200 9,250	2650 5,750	8520 340
-1500 mm -60 in	kg lb	*9150 *20,250	*9150 *20,250	*9900 *22,450	*9900 *22,450	*9200 *20,000	6250 13,450	6900 14,850	4150 8,950	5000 10,800	3100 6,650	*4450 *9,750	2850 6,300	8020 320
-3000 mm -120 in	kg lb	*14 800 *33,100	*14 800 *33,100	*10 000 *21,650	*10 000 *21,650	*6850 *14,700	6350 13,700	*5300 *11,250	4250 9,100			*3900 *8,650	3400 7,600	7120 280
-4500 mm -180 in	kg lb	*22 150 *49,250	*22 150 *49,250	*10 400 *22,550	*10 400 *22,550	*6650 *14,500	*6650 14,500					*6150 *14,200	6000 14,050	4880 190



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*4950 *11,150	*4950 *11,150					*4950 *11,200	*4950 *11,200	5120 200
7500 mm 300 in	kg lb					*7000 *15,450	*7000 *15,450	*4150 *9,300	*4150 *9,300			*4250 *9,400	*4250 *9,400	6740 270
6000 mm 240 in	kg lb					*7350 *16,050	*7350 *16,050	*5200 *10,050	*5200 *10,050	*4000 *8,700	*4000 *8,700	*3950 *8,700	3850 8,550	7740 310
4500 mm 180 in	kg lb			*11 300 *24,600	*11 300 *24,600	*7150 *15,600	*7150 *15,600	*4850 *10,350	*4850 *10,350	*3950 *8,700	*3950 *8,600	*3850 *8,500	3300 7,350	8360 330
3000 mm 120 in	kg lb	*9050 *16,000	*9050 *16,000	*10 250 *23,350	*10 250 *23,350	*6650 *14,550	*6650 *14,550	*4100 *8,950	*4100 *8,950	*4200 *9,350	3850 8,300	*3950 *8,650	3050 6,700	8680 350
1500 mm 60 in	kg lb			*5950 *13,350	*5950 *13,350	*6100 *13,150	*6100 *13,150	*4700 *10,150	*4700 *10,150	*4800 *10,400	3700 7,950	*4150 *9,050	2950 6,500	8730 350
0 mm 0 in	kg lb	*6600 *14,250	*6600 *14,250	*5550 *12,250	*5550 *12,250	*8050 *17,350	7350 15,850	*5600 *12,100	4900 10,550	*5450 *12,100	3600 7,750	*4500 *9,900	3050 6,650	8520 340
-1500 mm -60 in	kg lb	*9150 *20,250	*9150 *20,250	*9900 *22,450	*9900 *22,450	*9200 *20,000	7300 15,700	*7150 *15,400	4850 10,400	*5300 *11,200	3600 7,700	*4450 *9,750	3300 7,250	8020 320
-3000 mm -120 in	kg lb	*14 800 *33,100	*14 800 *33,100	*10 000 *21,650	*10 000 *21,650	*6850 *14,700	*6850 *14,700	*5300 *11,250	4900 10,550			*3900 *8,650	*3900 *8,650	7120 280
-4500 mm -180 in	kg lb	*22 150 *49,250	*22 150 *49,250	*10 400 *22,550	*10 400 *22,550	*6650 *14,500	*6650 *14,500					*6150 *14,200	*6150 *14,200	4880 190



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On

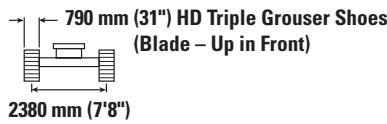

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*4950 *11,150	*4950 *11,150					*4950 *11,200	*4950 *11,200	5120 200
7500 mm 300 in	kg lb					*7000 *15,450	*7000 *15,450	*4150 *9,300	*4150 *9,300			*4250 *9,400	*4250 *9,400	6740 270
6000 mm 240 in	kg lb					*7350 *16,050	*7350 *16,050	*5200 *10,050	*5200 *10,050	*4000 *8,700	3650 7,750	*3950 *8,700	3450 7,600	7740 310
4500 mm 180 in	kg lb			*11 300 *24,600	*11 300 *24,600	*7150 *15,600	*7150 *15,600	*4850 *10,350	*4850 *10,350	*3950 *8,700	3550 7,650	*3850 *8,500	2950 6,500	8360 330
3000 mm 120 in	kg lb	*9050 *16,000	*9050 *16,000	*10 250 *23,350	*10 250 *23,350	*6650 *14,550	*6650 *14,550	*4100 *8,950	*4100 *8,950	*4200 *9,350	3450 7,350	*3950 *8,650	2700 5,950	8680 350
1500 mm 60 in	kg lb			*5950 *13,350	*5950 *13,350	*6100 *13,150	*6100 *13,150	*4700 *10,150	4500 9,650	*4800 *10,400	3300 7,050	*4150 *9,050	2600 5,750	8730 350
0 mm 0 in	kg lb	*6600 *14,250	*6600 *14,250	*5550 *12,250	*5550 *12,250	*8050 *17,350	6400 13,750	*5600 *12,100	4300 9,250	5100 11,000	3150 6,800	4300 9,400	2650 5,850	8520 340
-1500 mm -60 in	kg lb	*9150 *20,250	*9150 *20,250	*9900 *22,450	*9900 *22,450	*9200 *20,000	6350 13,650	7000 15,050	4250 9,100	5100 10,950	3150 6,800	*4450 *9,750	2900 6,400	8020 320
-3000 mm -120 in	kg lb	*14 800 *33,100	*14 800 *33,100	*10 000 *21,650	*10 000 *21,650	*6850 *14,700	6450 13,900	*5300 *11,250	4300 9,250			*3900 *8,650	3450 7,700	7120 280
-4500 mm -180 in	kg lb	*22 150 *49,250	*22 150 *49,250	*10 400 *22,550	*10 400 *22,550	*6650 *14,500	*6650 *14,500					*6150 *14,200	6050 *14,200	4880 190



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Variable Angle Boom Lift Capacities – Counterweight: 4.9 mt (10,800 lb) – without Bucket, Heavy Lift: On



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*4950 *11,150	*4950 *11,150					*4950 *11,200	*4950 *11,200	5120 200
7500 mm 300 in	kg lb					*7000 *15,450	*7000 *15,450	*4150 *9,300	*4150 *9,300			*4250 *9,400	*4250 *9,400	6740 270
6000 mm 240 in	kg lb					*7350 *16,050	*7350 *16,050	*5200 *10,050	*5200 *10,050	*4000 *8,700	*4000 *8,700	*3950 *8,700	3900 8,650	7740 310
4500 mm 180 in	kg lb			*11 300 *24,600	*11 300 *24,600	*7150 *15,600	*7150 *15,600	*4850 *10,350	*4850 *10,350	*3950 *8,700	*3950 *8,700	*3850 *8,500	3350 7,450	8360 330
3000 mm 120 in	kg lb	*9050 *16,000	*9050 *16,000	*10 250 *23,350	*10 250 *23,350	*6650 *14,550	*6650 *14,550	*4100 *8,950	*4100 *8,950	*4200 *9,350	3900 8,400	*3950 *8,650	3100 6,800	8680 350
1500 mm 60 in	kg lb			*5950 *13,350	*5950 *13,350	*6100 *13,150	*6100 *13,150	*4700 *10,150	*4700 *10,150	*4800 *10,400	3750 8,100	*4150 *9,050	3000 6,600	8730 350
0 mm 0 in	kg lb	*6600 *14,250	*6600 *14,250	*5550 *12,250	*5550 *12,250	*8050 *17,350	7500 16,100	*5600 *12,100	4950 10,700	*5450 *12,100	3650 7,850	*4500 *9,900	3100 6,750	8520 340
-1500 mm -60 in	kg lb	*9150 *20,250	*9150 *20,250	*9900 *22,450	*9900 *22,450	*9200 *20,000	7450 15,950	*7150 *15,400	4900 10,550	*5300 *11,200	3650 7,850	*4450 *9,750	3350 7,350	8020 320
-3000 mm -120 in	kg lb	*14 800 *33,100	*14 800 *33,100	*10 000 *21,650	*10 000 *21,650	*6850 *14,700	*6850 *14,700	*5300 *11,250	4950 10,700			*3900 *8,650	*3900 *8,650	7120 280
-4500 mm -180 in	kg lb	*22 150 *49,250	*22 150 *49,250	*10 400 *22,550	*10 400 *22,550	*6650 *14,500	*6650 *14,500					*6150 *14,200	*6150 *14,200	4880 190



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

325 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill	Long Undercarriage						
									4.9 mt (10,800 lb) Counterweight				8.3 mt (18,300 lb) Counterweight		
									With Blade Up in Front				No Blade		
									Reach Boom	HD Reach Boom		VA Boom	Reach Boom	HD Reach Boom	
R2.9 (9'6")	R2.9 (9'6")	HD R2.9 (9'6")	R2.9 (9'6")	R2.9 (9'6")	R2.9 (9'6")	HD R2.9 (9'6")									
Pin-On (No Quick Coupler)															
General Duty	B	600	24	0.46	0.61	555	1,223	100	●	●	●	●	●	●	●
	B	750	30	0.64	0.84	626	1,380	100	●	●	●	●	●	●	●
	B	1300	51	1.30	1.70	835	1,841	100	⊖	⊖	⊖	○	●	●	●
	B	1400	55	1.43	1.87	879	1,937	100	X	X	X	X	X	X	X
General Duty (No Bucket Adjuster)	B	600	24	0.46	0.60	550	1,212	100	●	●	●	●	●	●	●
	B	750	30	0.64	0.84	621	1,368	100	●	●	●	●	●	●	●
	B	1000	39	0.93	1.22	717	1,580	100	●	●	●	⊙	●	●	●
	B	1200	48	1.19	1.56	807	1,778	100	⊙	⊙	⊙	⊖	●	●	●
Heavy Duty	B	1400	55	1.43	1.87	874	1,926	100	X	X	X	X	X	X	X
	B	1500	60	1.58	2.06	914	2,014	100	X	X	X	X	X	X	X
	B	1050	42	1.00	1.31	892	1,967	100	●	●	⊙	⊖	●	●	●
Severe Duty	B	1200	48	1.19	1.56	917	2,022	100	⊖	⊖	⊖	○	●	●	●
	B	1300	52	1.30	1.70	974	2,148	100	⊖	⊖	⊖	○	●	●	●
	B	1050	42	1.00	1.31	948	2,091	90	●	●	●	⊙	●	●	●
Ditch Cleaning	B	1200	48	1.20	1.57	1011	2,229	90	⊙	⊙	⊖	⊖	●	●	●
Ditch Cleaning Tilt	B	2000	78	1.22	1.60	869	1,916	100	⊖	⊖	⊖	○	●	●	●
Maximum load with pin-on (payload + bucket)								kg	2900	2940	2845	2600	3780	3830	3730
								lb	6,393	6,482	6,272	5,732	8,333	8,444	8,223
With Pin Grabber Coupler															
General Duty	B	600	24	0.46	0.61	555	1,223	100	●	●	●	●	●	●	●
	B	750	30	0.64	0.84	626	1,380	100	●	●	●	●	●	●	●
	B	1300	51	1.30	1.70	835	1,841	100	○	○	○	◇	⊙	⊙	⊙
	B	1400	55	1.43	1.87	879	1,937	100	◇	○	◇	◇	⊙	⊙	⊖
General Duty	B	600	24	0.46	0.60	550	1,212	100	●	●	●	●	●	●	●
	B	750	30	0.64	0.84	621	1,368	100	●	●	●	●	●	●	●
	B	1000	39	0.93	1.22	717	1,580	100	⊙	⊙	⊙	⊖	●	●	●
	B	1200	48	1.19	1.56	807	1,778	100	○	⊖	○	○	●	●	●
	B	1400	55	1.43	1.87	874	1,926	100	◇	○	◇	◇	⊙	⊙	⊖
Heavy Duty	B	1500	60	1.58	2.06	914	2,014	100	◇	◇	◇	X	⊖	⊖	⊖
	B	1050	42	1.00	1.31	892	1,967	100	⊖	⊖	⊖	○	●	●	●
	B	1200	48	1.19	1.56	917	2,022	100	○	○	○	◇	●	●	●
Severe Duty	B	1300	52	1.30	1.70	974	2,148	100	○	○	◇	◇	⊙	⊙	⊙
	B	1050	42	1.00	1.31	948	2,091	90	⊖	⊙	⊖	○	●	●	●
Ditch Cleaning	B	1200	48	1.20	1.57	1011	2,229	90	○	○	○	◇	●	●	●
Ditch Cleaning Tilt	B	2000	78	1.22	1.60	869	1,916	100	○	○	○	◇	●	●	●
Maximum load with coupler (payload + bucket)								kg	2478	2518	2423	2178	3358	3408	3308
								lb	5,463	5,552	5,343	4,802	7,404	7,514	7,294

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451:2007. Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

325 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility (continued)

	Linkage	Width		Capacity		Weight		Fill	Long Undercarriage							
		mm	in	m³	yd³	kg	lb		%	4.9 mt (10,800 lb) Counterweight				8.3 mt (18,300 lb) Counterweight		
										With Blade Up in Front				No Blade		
										Reach Boom	HD Reach Boom		VA Boom	Reach Boom	HD Reach Boom	
R2.9 (9'6")	R2.9 (9'6")	HD R2.9 (9'6")	R2.9 (9'6")	R2.9 (9'6")	R2.9 (9'6")	HD R2.9 (9'6")										
With CW40 Coupler																
General Duty	B	900	36	0.81	1.06	664	1463	100	●	●	●	●	●	●	●	
	B	1050	42	1.00	1.31	711	1,567	100	⊙	⊙	⊙	⊖	●	●	●	
	B	1200	48	1.19	1.56	781	1,721	100	⊖	⊖	⊖	○	●	●	●	
	B	1300	51	1.30	1.70	813	1,791	100	○	⊖	○	○	●	●	●	
General Duty with Leveling Edge	B	650	26	0.70	0.92	567	1,249	100	●	●	●	●	●	●	●	
	B	800	31	0.68	0.89	614	1,353	100	●	●	●	●	●	●	●	
	B	1200	47	1.19	1.56	787	1,734	100	⊖	⊖	⊖	○	●	●	●	
	B	1400	55	1.43	1.87	855	1,884	100	○	○	○	◇	⊙	⊙	⊙	
Heavy Duty	B	600	24	0.46	0.61	618	1,363	100	●	●	●	●	●	●	●	
	B	1200	48	1.19	1.56	886	1,953	100	⊖	⊖	⊖	○	●	●	●	
	B	1300	52	1.30	1.71	944	2,081	100	X	X	X	X	X	X	X	
Ditch Cleaning	B	2100	83	1.29	1.69	792	1,746	100	⊖	⊖	○	○	●	●	●	
	B	2100	83	1.46	1.91	809	1,784	100	○	○	○	◇	⊙	⊙	⊙	
	B	1800	72	1.50	1.96	775	1,709	100	○	○	○	◇	⊙	⊙	⊙	
	B	1800	72	1.50	1.96	737	1,624	100	○	○	○	◇	⊙	⊙	⊙	
	B	2100	83	1.76	2.31	864	1,905	100	◇	◇	◇	X	⊖	⊖	⊖	
Ditch Cleaning Tilt	B	2000	79	1.23	1.61	1161	2,560	100	○	○	○	◇	⊙	⊙	⊙	
Maximum load with coupler (payload + bucket)									kg	2650	2690	2595	2350	3530	3580	3480
									lb	5,842	5,930	5,721	5,181	7,782	7,893	7,672
With CW40S Coupler																
General Duty	B	600	24	0.46	0.61	508	1,119	100	●	●	●	●	●	●	●	
	B	750	30	0.64	0.84	592	1,305	100	●	●	●	●	●	●	●	
	B	900	36	0.81	1.06	661	1,457	100	●	●	●	●	●	●	●	
	B	1300	51	1.30	1.70	810	1,785	100	⊖	⊖	○	○	●	●	●	
	B	1400	55	1.43	1.87	845	1,862	100	○	○	○	◇	⊙	⊙	⊙	
Heavy Duty	B	600	24	0.46	0.61	585	1,289	100	●	●	●	●	●	●	●	
	B	1200	48	1.19	1.56	875	1,928	100	⊖	⊖	⊖	○	●	●	●	
	B	1300	52	1.30	1.70	931	2,052	100	X	X	X	X	X	X	X	
Ditch Cleaning	B	2000	78	1.22	1.60	815	1,797	100	⊖	⊖	⊖	○	●	●	●	
	B	2200	87	1.36	1.78	880	1,940	100	○	○	○	◇	⊙	⊙	⊙	
Ditch Cleaning Tilt	B	2000	79	1.23	1.61	1142	2,518	100	○	○	○	◇	⊙	●	⊙	
Maximum load with coupler (payload + bucket)									kg	2669	2709	2614	2369	3549	3599	3499
									lb	5,884	5,972	5,763	5,223	7,824	7,934	7,714

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

325 Hydraulic Excavator Specifications

Attachments Offering Guide

PIN-ON ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓
	MP318 D Jaws	✓	✓	✓	✓	✓
	MP318 P Jaws	✓	✓	✓	✓	✓
	MP318 S Jaws	✓	✓	✓	✓	✓
	MP318 U Jaws	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓
	G320B	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓
Orange Peel Grapples		✓	✓	✓	✓	✓
Rippers		✓	✓	✓	✓	✓
Cat Pin Grabber Couplers		✓	✓	✓	✓	✓
CW-Dedicated Couplers		✓	✓	✓	✓	✓
Tilt-rotators	TRS18	✓	✓	✓	✓	✓

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

PIN-ON ATTACHMENTS

Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓
	MP318 D Jaws	✓	✓	✓	✓	✓
	MP318 P Jaws	✓	✓	✓	✓	✓*
	MP318 S Jaws	✓	✓	✓	✓	✓
	MP318 U Jaws	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓
	G320B	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓	✓	✓*
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓
Orange Peel Grapples		✓	✓	✓	✓	✓
Rippers		✓	✓	✓	✓	✓
Cat Pin Grabber Couplers		✓	✓	✓	✓	✓
CW-Dedicated Couplers		✓	✓	✓	✓	✓
Tilt-rotators	TRS18	✓	✓	✓	✓	✓

*Working range front only.

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide (continued)

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓
	MP318 D Jaws	✓	✓	✓	✓	✓
	MP318 P Jaws	✓	✓	✓	✓	✓
	MP318 S Jaws	✓	✓	✓	✓	✓
	MP318 U Jaws	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓
Rippers		✓	✓	✓	✓	✓
Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓*
Multi-Processors	MP318 CC Jaws	✓	✓	✓*	✓*	✓*
	MP318 D Jaws	✓	✓	✓*	✓*	✓*
	MP318 P Jaws	✓	✓*			
	MP318 S Jaws	✓	✓	✓	✓*	
	MP318 U Jaws	✓	✓*	✓*	✓*	
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓*
	G315B	✓	✓*	✓*	✓*	
Mobile Scrap and Demolition Shears	S3025	✓*				
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓*
Crushers	P315	✓	✓*	✓	✓*	
Rippers		✓	✓	✓	✓	✓

*Working range front only.

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide (continued)

CW-40S DEDICATED COUPLER ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓
	MP318 D Jaws	✓	✓	✓	✓	✓
	MP318 P Jaws	✓	✓	✓	✓	✓
	MP318 S Jaws	✓	✓	✓	✓	✓
	MP318 U Jaws	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓	✓	
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓
Rippers		✓	✓	✓	✓	✓
Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓*
	MP318 D Jaws	✓	✓	✓	✓	✓*
	MP318 P Jaws	✓	✓*	✓	✓*	
	MP318 S Jaws	✓	✓	✓	✓	✓*
	MP318 U Jaws	✓	✓	✓	✓	✓*
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓*
Mobile Scrap and Demolition Shears	S3025	✓*	✓*	✓*		
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓*
Rippers		✓	✓	✓	✓	✓

*Working range front only.

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide (continued)

CW-40 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓
	MP318 D Jaws	✓	✓	✓	✓	✓
	MP318 P Jaws	✓	✓	✓	✓	✓
	MP318 S Jaws	✓	✓	✓	✓	✓
	MP318 U Jaws	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓	✓	✓	
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓
Rippers		✓	✓	✓	✓	✓
Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	H130E S	✓	✓	✓	✓	✓
Multi-Processors	MP318 CC Jaws	✓	✓	✓	✓	✓*
	MP318 D Jaws	✓	✓	✓	✓	✓*
	MP318 P Jaws	✓	✓*	✓	✓*	
	MP318 S Jaws	✓	✓	✓	✓	✓*
	MP318 U Jaws	✓	✓	✓	✓	✓*
Demolition and Sorting Grapples	G315 GC	✓	✓	✓	✓	✓
	G315B	✓	✓	✓	✓	✓*
Mobile Scrap and Demolition Shears	S3025	✓*		✓*		
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
Pulverizers	P215	✓	✓	✓	✓	✓
Crushers	P315	✓	✓	✓	✓	✓*
Rippers		✓	✓	✓	✓	✓

*Working range front only.

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

TRS18 WITH CW-30S ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H115E S	✓	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓	
	H120E S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G215 GC	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓
	CVP110	✓	✓	✓	✓	✓
Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H115E S	✓	✓	✓	✓	✓
	H120 GC S	✓*	✓*	✓*	✓*	
	H120E S	✓	✓	✓	✓	✓*
Demolition and Sorting Grapples	G215 GC	✓	✓	✓	✓	✓*
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓
	CVP110	✓	✓	✓	✓	✓

*Working range front only.

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide *(continued)*

TRS18 WITH CW-30 ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H115E S	✓	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G215 GC	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓
	CVP110	✓	✓	✓	✓	✓
Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H115E S	✓	✓	✓	✓	✓
	H120 GC S	✓	✓*	✓*	✓*	
	H120E S	✓	✓	✓	✓*	
Demolition and Sorting Grapples	G215 GC	✓	✓	✓	✓	
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓
	CVP110	✓	✓	✓	✓	✓

*Working range front only.

(continued on next page)

325 Hydraulic Excavator Specifications

Attachments Offering Guide (continued)

TRS18 WITH S70 ATTACHMENTS

Undercarriage		Long				
Counterweight		8.3 mt (18,300 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H115E S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓
	G215 GC	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	CVP75	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
	CVP110	✓	✓	✓	✓	✓
Undercarriage		Long with Blade				
Counterweight		4.9 mt (10,800 lb)				
Boom Type		Reach		HD Reach		Variable Angle
Stick Size		2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")	HD 2.9 m (9'6")	2.9 m (9'6")
Hydraulic Hammers	H115E S	✓	✓	✓	✓	✓
	H120E S	✓	✓	✓	✓	✓*
	G215 GC	✓	✓	✓	✓	✓*
Demolition and Sorting Grapples	CVP75	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓
	CVP110	✓	✓	✓	✓	✓

*Working range front only.

BOOM-MOUNT ATTACHMENTS

Undercarriage		Long		
Counterweight		8.3 mt (18,300 lb)		
Boom Type		Reach	HD Reach	Variable Angle
Mobile Scrap and Demolition Shears	S2050	✓	✓	✓
	S3035	✓	✓	✓
Undercarriage		Long with Blade		
Counterweight		4.9 mt (10,800 lb)		
Boom Type		Reach	HD Reach	Variable Angle
Mobile Scrap and Demolition Shears	S2050	✓	✓	✓
	S3035	✓	✓	✓

325 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
CAT TECHNOLOGY			ENGINE		
Cat Product Link™	✓		Three selectable modes: Power, Smart, Eco	✓	
Work tool recognition	✓		4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
Work tool tracking*	✓		50° C (122° F) high-ambient cooling capacity with derate	✓	
Laser catcher		✓	-18° C (0° F) cold start capability	✓	
Cat GRADE with 2D and offset memory	✓		Sealed double element air filter with integrated precleaner	✓	
Cat GRADE with Advanced 2D		✓	1 × 145 Amp dual alternator	✓	
Cat GRADE with 3D connectivity:		✓	Electric fuel priming pump	✓	
– Virtual Reference Station**			Reversible electric cooling fans	✓	
– Internet Base Service Station**			Two-stage fuel filtration system with water separator and indicator	✓	
– Trimble Connected Community**			Biodiesel capable (up to B20)	✓	
Cat Assist:	✓		HYDRAULIC SYSTEM		
– Grade Assist			Electric main control valve	✓	
– Boom Assist			Boom and stick regeneration circuits	✓	
– Bucket Assist			Automatic hydraulic oil warm up	✓	
– Swing Assist			Automatic two-speed travel	✓	
– Lift Assist			Boom and stick drift reduction valve	✓	
Cat PAYLOAD:	✓		Standard swivel joint	✓	
– Static weigh			CRN compliant accumulator	✓	
– Semiautomatic calibration			Tandem type electronic main pump	✓	
– Payload/cycle information			Element type main hydraulic filter	✓	
– USB reporting capability			Pump suction line for medium pressure or blade	✓	
2D E-Fence:	✓				
– E-ceiling					
– E-floor					
– E-swing					
– E-wall					
– E-cab avoidance					
Auto hammer stop	✓				
Remote Services capability	✓				

*Paired with PL161 attachment locator.

**Subscription required.

(continued on next page)

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
UNDERCARRIAGE AND STRUCTURES			ELECTRICAL SYSTEM		
Base frame with standard track rollers and standard carrier rollers		✓	Maintenance free battery	✓	
Base frame with standard track rollers and standard carrier rollers for use with blade		✓	LED chassis light, left-hand/right-hand boom lights, cab lights – 1,800 lumens	✓	
Tie-down points on base frame (ISO 15818 compliant)	✓		Centralized electrical disconnect switch	✓	
Grease lubricated track	✓		Programmable time delay working lights after engine shutdown	✓	
Track guiding guard, segmented two pieces for long undercarriage	✓		SERVICE AND MAINTENANCE		
HD bottom guards	✓		Sampling ports for Scheduled Oil Sampling (S·O·S SM)	✓	
HD travel motor guards	✓		Grouped location for engine oil and fuel filters	✓	
Standard swivel guard		✓	Ground-level second dipstick for engine oil	✓	
4.9 mt (10,800 lb) counterweight		✓	SAFETY AND SECURITY		
8.3 mt (18,300 lb) counterweight*		✓	Rear and right-hand-sideview cameras	✓	
600 mm (24") triple grouser track shoes		✓	360° visibility		✓
700 mm (28") triple grouser track shoes		✓	Right-hand handrail and hand hold (ISO 2867 compliant)	✓	
790 mm (31") triple grouser track shoes with step extension for ISO 2867		✓	Service platform with anti-skid plate and countersunk bolts	✓	
2980 mm (9'9") blade		✓	Hydraulic lock out lever neutralizes all controls	✓	
3170 mm (10'5") blade		✓	Ground-level accessible secondary engine shutoff switch in cab	✓	
BOOMS, STICKS AND LINKAGES			Signaling/warning horn	✓	
Boom cylinders	✓				
5.7 m (18'8") Reach boom		✓			
5.7 m (18'8") HD Reach boom		✓			
2.7 m (8'10") Variable Angle boom, 2.7 m (8'10") stub + 3.3 m (10'10") fore		✓			
2.9 m (9'6") Reach stick		✓			
2.9 m (9'6") HD Reach stick		✓			
Bucket linkage, B1 family with lifting eye, Cat GRADE	✓				

*Not compatible with blade.

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB

- Left-hand electrical pedal (two-way) for tool control
- Right-hand electrical pedal (two-way) for tool control
- Dual exit rear window kit
- Rain protector plus cab light cover
- Front windshield laminated glass (P5A glass, EU demolition regulation)
- Key fob for use with Bluetooth® receiver

SAFETY AND SECURITY

- 76 mm (3") retractable seat belt

GUARDS

- Falling object guard system
- Mesh guard full front
- Mesh guard lower half front
- Cab vandalism guard

Cab Options

	Deluxe	Premium
ROPS, standard sound suppression	●	X
ROPS, advanced sound suppression	X	●
High-resolution 254 mm (10") LCD touchscreen monitor	●	●
Additional high-resolution LCD touchscreen monitor for Cat GRADE Advanced 2D and 3D	○	○
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
Height-adjustable infinite, with no tool	●	●
Tilt-up left-side console	●	●
Heated seat with air-adjustable suspension	●	X
Heated and cooled seat with automatic adjustable suspension	X	●
51 mm (2") orange seat belt	●	●
Bluetooth integrated radio (including USB, aux port and microphone)	●	●
2 × 12V DC outlets	●	●
Document storage	●	●
Rear head storage net and lunchbox storage net	●	●
Cup and bottle holders	●	●
One-piece windshield (with fixed glass skylight)	X	○
Openable two-piece front window	●	○
Upper radial wiper with washer	●	X
Parallel wiper with washer	X	●
Openable polycarbonate skylight hatch	●	○
Fixed glass skylight (with one-piece windshield)	X	○
LED dome light	●	●
Floor welcome light	●	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	●
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●

- Standard
- Optional
- X Not available

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2020 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ2730 (02-2020)
Build Number: 07A
(Europe)

